



TUBABSORBER SY[®]

Tuned Absorption Panel



The Tubabsorber SY[®] is a smaller version of similar product Tubabsorber[®]. Due to its smaller resonance chamber, this product is tuned to a higher frequency.


This product can be placed in small or medium-sized rooms as an absorber of medium/low frequencies or as an application complement in larger rooms.

The materials used in its manufacture are very light and highly efficient, thereby making this model quite versatile to mount and efficient to apply. This product can also be installed on the vertical and horizontal edges between walls and ceilings, by using the accessories we supply for that purpose.


Features:

- Uses 60% of recycled materials.
- Average absorption: 0.84/ m2[>50Hz; <250KHz].
- 100% recyclable.
- Fire-resistance: M2.
- Package: 2 and 4 units.
- Installation: accessories included.

Standard Fabric Colours:

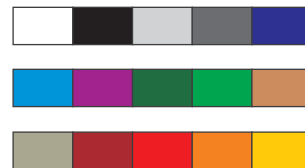

Technical Drawing:

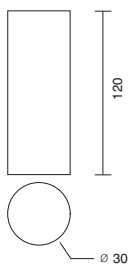


TUB120

Models:

	H	Ø	Kg
TUB120	120 cm	30 cm	7

Absorption Coefficient:

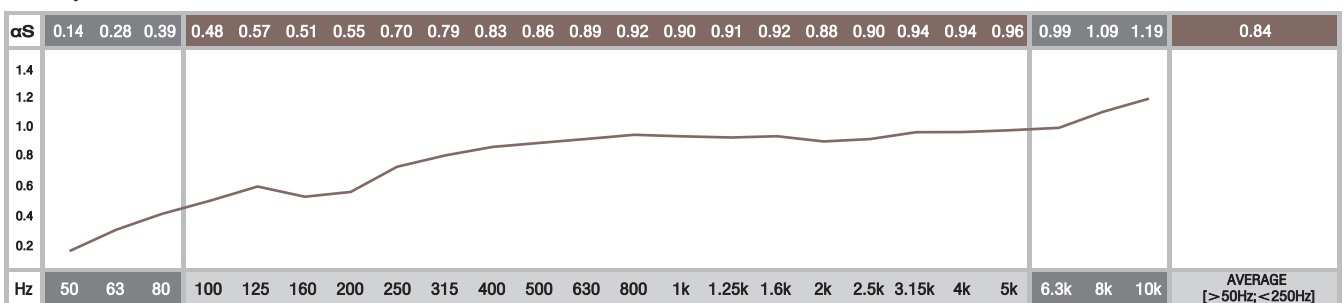

— ABSORPTION COEFFICIENT: Values in accordance with the standards: EN 20654, ASTM C423 and EN 11654.

■ Values [<100Hz and > 5k] are Non Standard Values.